


Calinor EVO

Calinor EVO Floodlight PIR Cool White 10W Black Code: ACAE10/1/CW/B/PIR

| | ; ;e | N G |
|------------------|---------|-----------------|
| @ansell_lighting | f | anselllighting |
| Ansell Lighting | 0 | ansell_lighting |

| Category | Floodlights |
|---------------|---|
| Application | Commercial, Industrial, Outdoor, Retail |
| Specification | Performance |

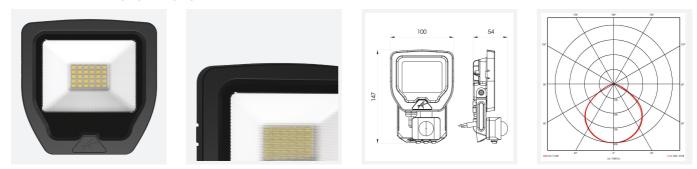

PRODUCT FEATURES

- Compact, slim and robust designed LED floodlight suitable for residential and commercial applications
- Toughened microprism glass for visual comfort, uniformity and durability
- Pre-wired with 1 metre of rubber insulated cable for ease of installation and easy integration with Floodbox accessory
- Polycarbonate spike accessory allowing installation into lawn and garden applications

| GENERAL INFORMATION | | |
|-------------------------|--------------|--|
| Wattage | 10W | |
| Lumens Delivered | 1100lm | |
| Lm/W | 112lm/W | |
| Beam Angle | 100 | |
| CRI | 80 | |
| CCT | 4000K | |
| Input | 220/240V | |
| Operating Temp | -15°C - 40°C | |
| SDCM | 6 | |
| Energy efficiency class | D | |

| Polycarbonate front trim provides excellent corrosion resistance |
|--|
|--|

- Bracket design allows installation without removing mounting bracket
- Breather gland acts to minimise risk of water ingress
- PIR versions complete with manual override facility

| TECHNICAL INFORMATION | | | |
|--------------------------------|-------------|--|--|
| Light Source | LED | | |
| Colour / Finish | Black | | |
| IP Rating | IP65 | | |
| Class Protection | 1 | | |
| Internal / External | External | | |
| Surface / Recessed / Suspended | Surface | | |
| Lumen Depreciation | L80 69,000h | | |
| Warranty (Years) | 5 | | |
| CE Mark | Yes | | |
| Height | 147 mm | | |

