HOT AEROSOL FIRE EXTINGUISHING DEVICE

Spray Release Time	≤6S
Applicable environmental	-50~+90℃ ＜95%RH
Oxidizer Content/Strontium Nitrate Content	50%~58%
Protected Space	≤0.1m³
Installation	35mm Din Rail

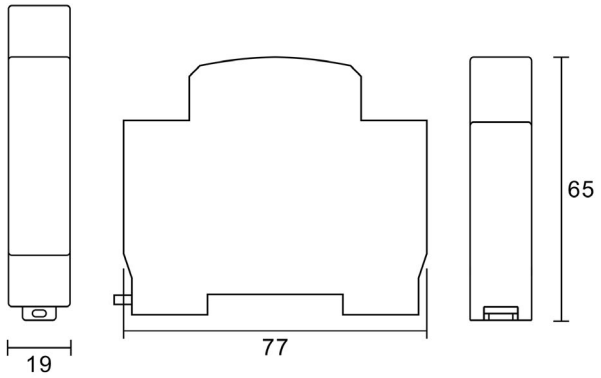

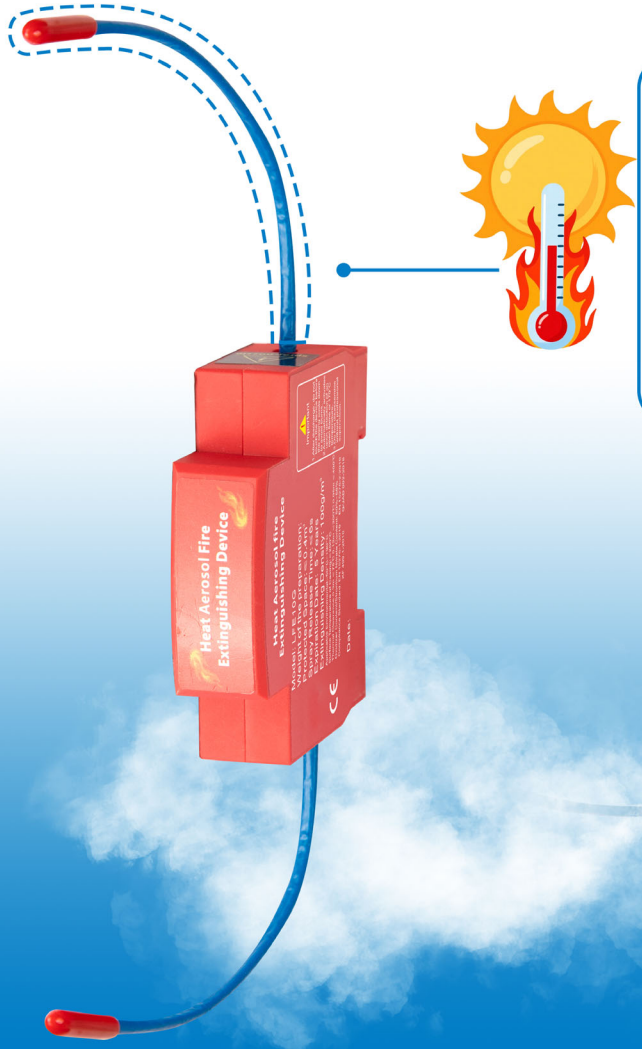

Temperature-Sensing Wire

High Fire-Extinguishing Efficiency And Fast Speed

Environmentally Friendly Residue-Free And Equipment-Friendly

Din-rail mountable

Video here

FOR MORE INFORMATION

CONTACT YOUR LIVE REP

VISIT OUR WEBSITE
www.liveelectrical.co.uk