

4 4 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only




Doxa II

08050

DOX20103

Doxa II Standard Exit Sign with Multiple Mounting Positions

- 7 mounting positions
- Maintained or non-maintained operation
- Integrated mounting clips
- Available in self-test version
- Optional self-test model according to BS-EN-62034-2012

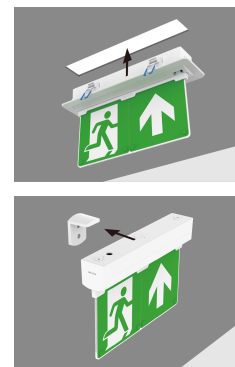

Overview

The Kosnic Doxa II emergency exit sign is a self-contained, multi-purpose, maintained or non-maintained 3-hour emergency exit sign solution. The fitting is adaptable to be surface mounted in multiple positions. Also, available in self-test version.



IP20



General Information

IP Rating	IP20
Installation Area	Internal
UEM/EME Protection	Class II

Technical Summary

Product Code	DOX20103
Emergency Luminous Flux	30 lm
Maintained Luminous Flux	50 lm
UEM/EME Battery Life	4 y
UEM/EME Input Voltage	220-240Vac 50/60Hz
UEM/EME Ambient Temperature Range	0°C to 40°C
UEM/EME Power Factor	0.5
UEM/EME CCT	6,500 K
UEM/EME Input Power (Max)	3 W
UEM/EME Protection	Class II
UEM/EME Weight	0.735 kg
UEM/EME Dimensions (L x W x D) (mm)	172.5x264x45
UEM/EME Emergency Operation Test	Manual



Kosnic Lighting



KosnicUK



KosnicLightingUK



KosnicUK

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

4 **4 Years**
Product Warranty
UK Only

2 **2 Years**
On-Site Warranty
Main-land UK Only

Doxa II



08050 DOX20103

Accessories

Product Code	Description	Type
BAT18LFP1	Battery for Doxa II	Battery

Overview

The Kosnic Doxa II emergency exit sign is a self-contained, multi-purpose, maintained or non-maintained 3-hour emergency exit sign solution. The fitting is adaptable to be surface mounted in multiple positions. Also, available in self-test version.




IP20



General Information

IP Rating	IP20
Installation Area	Internal
UEM/EME Protection	Class II

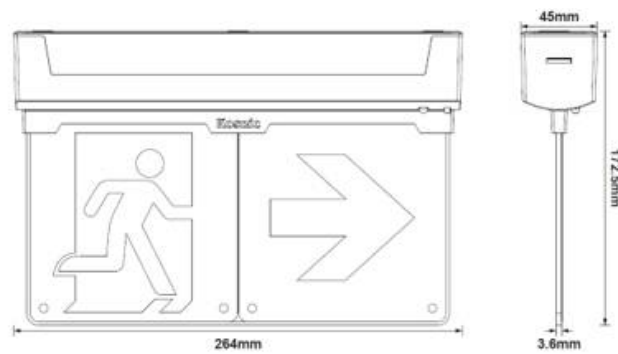

Kosnic Lighting



KosnicUK



KosnicLightingUK



KosnicUK

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com